

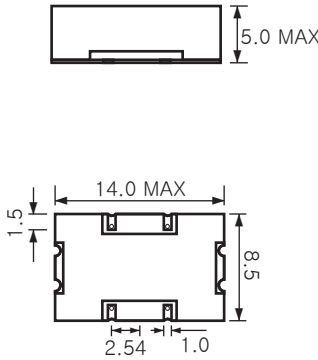
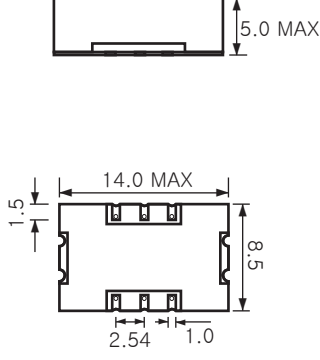
SMD 14X9 TYPE OSCILLATOR

SINEWAVE OUTPUT

Electrical Specification

Model	FGN5.0	FGN3.3
Supply Voltage (Vcc)	5Vdc \pm 5%(Std.)	3.3Vdc \pm 5%(Std.)
Frequency Range	8 to 200MHz	
Frequency Stability	See table 1 (OSC part number guide)	
Operating Temperature	See table 2 (OSC part number guide)	
Storage Temperature	-55 to 125 $^{\circ}$ C	
Supply Current	20mA Max @ 20MHz	
Output Level	1.0 Vpp Min	
Harmonics Level	< -30dBc	
Sputious Level	< -60dBc	
Load	50 Ω	
Aging	\pm 3.0ppm Max/Year(Std.)	

Dimensions

[4PAD]	[6PAD]																								
																									
<table border="1"> <thead> <tr> <th colspan="2">Pin Connection</th> </tr> </thead> <tbody> <tr> <td>#1</td> <td>N.C.</td> </tr> <tr> <td>#2</td> <td>Ground</td> </tr> <tr> <td>#3</td> <td>Output</td> </tr> <tr> <td>#4</td> <td>Vcc</td> </tr> </tbody> </table>	Pin Connection		#1	N.C.	#2	Ground	#3	Output	#4	Vcc	<table border="1"> <thead> <tr> <th colspan="2">Pin Connection</th> </tr> </thead> <tbody> <tr> <td>#1</td> <td>N.C.</td> </tr> <tr> <td>#2</td> <td>N.C.</td> </tr> <tr> <td>#3</td> <td>Ground</td> </tr> <tr> <td>#4</td> <td>Output</td> </tr> <tr> <td>#5</td> <td>N.C.</td> </tr> <tr> <td>#6</td> <td>Vcc</td> </tr> </tbody> </table>	Pin Connection		#1	N.C.	#2	N.C.	#3	Ground	#4	Output	#5	N.C.	#6	Vcc
Pin Connection																									
#1	N.C.																								
#2	Ground																								
#3	Output																								
#4	Vcc																								
Pin Connection																									
#1	N.C.																								
#2	N.C.																								
#3	Ground																								
#4	Output																								
#5	N.C.																								
#6	Vcc																								